


MODELS: 10, 15, 25, 45 & 60

CORD SECURED

LOCKING NUTS, WASHERS
OR BEAM CLAMP

UNISTRUT OR CEILING BEAM

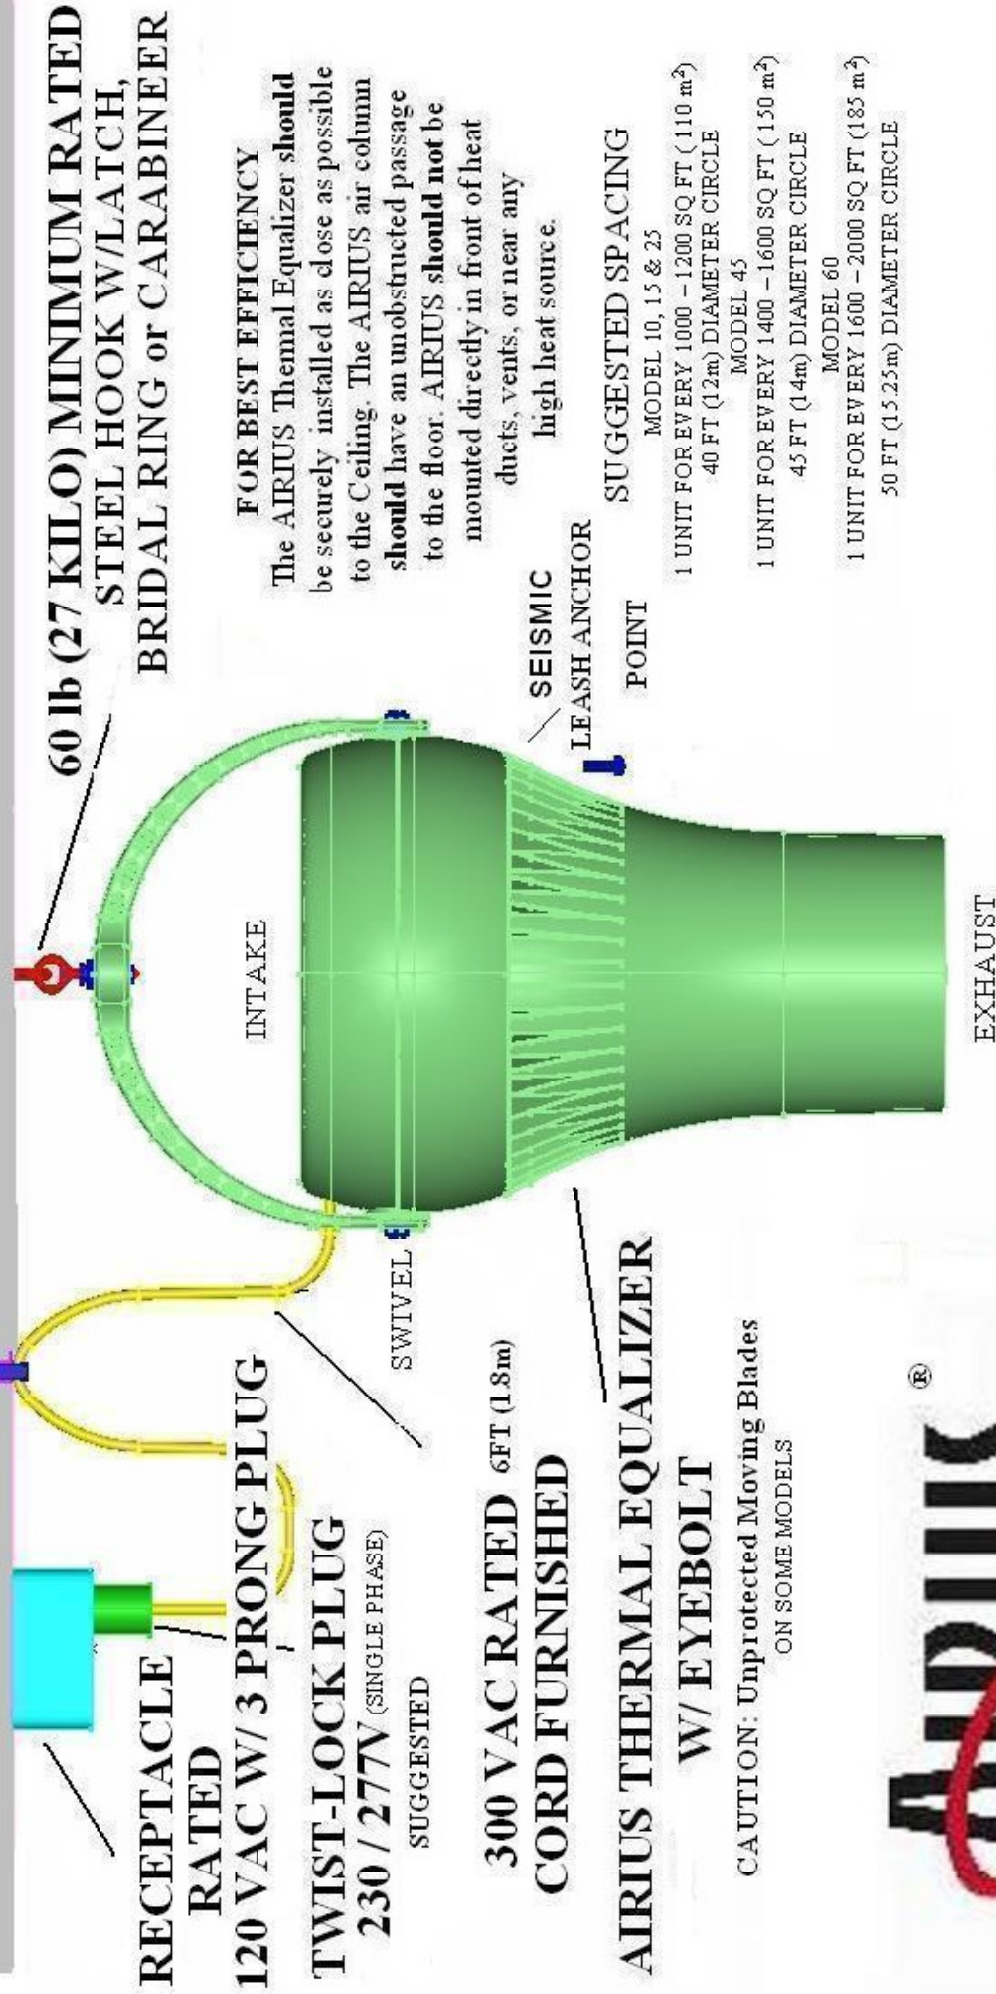

RECEPTACLE
RATED
120 VAC W/ 3 PRONG PLUG
TWIST-LOCK PLUG
230 / 277V (SINGLE PHASE)
SUGGESTED

300 VAC RATED 6FT (1.8m)
CORD FURNISHED

AIRIUS THERMAL EQUALIZER
W/ EYEBOLT

CAUTION: Unprotected Moving Blades
ON SOME MODELS



THE THERMAL EQUALIZER

MODELS: 10, 15, 25, 45, & 60

AIRIUS® MOUNTING GUIDELINES

NO SCALE

© 9/2009